

1.1 ÜRÜN BROŞÜRÜ

PRODUCT BROCHURE

KARMA PREMIUM-T5

KARMA PREMIUM-T5 LED TÜP
KARMA PREMIUM-T5 LED TUBE



ÜRÜN AVANTAJLARI / PRODUCT BENEFITS

- Yüksek Verimlilik / High Efficiency
- Farklı Kelvin Tercihleri / Different Kelvin Preferences
- Modülerlik - Sabit ve açılı uçlar (ops) / Modularity - Fixed and angled ends (opt)
- Acil Kit Seçeneği / Emergency Kit Option
- Farklı Güç Tercihleri / Different Power Preferences


ÜRÜN ÖZELLİKLERİ / PRODUCT FEATURES

180°'ye kadar ışık açısı, 54.000 - 63.000 arası kullanım ömrü, floresan tüplere göre %80' e yakın tasarruf, entegre harekete ve ışığa duyarlı sensör, dahili veya harici 1-3 saat acil kitli (Ni-Mh veya Ni-Cd batarya opsiyonel), standart tek uç enerji girişi

Light angle up to 180°, lifetime between 54.000 - 63.000, saving close to 80% compared to fluorescent tubes, integrated motion and light sensitive sensor, internal or external 1-3 hour emergency kit (Ni-Mh or Ni-Cd battery optional), standard single-end energy input


KARMA PREMIUM-T5 LED TÜP KARMA PREMIUM-T5 LED TUBE

ÖLÇÜLER / DIMENSIONS

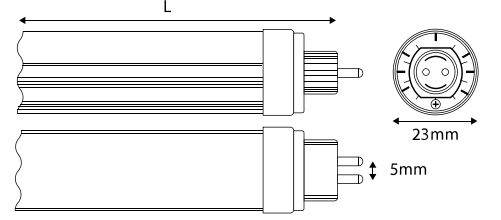

Ürün Kodu / Product Code	Güç / Power (W)	Verim / Efficiency (Lm/W)	Işık Akısı / Luminous Flux (Lm)	Enerji Etiketi / Energy Label	Ürün Ölçü / Dimension Ø L (mm)	Ürün Ağırlık / Product W. (Kg)	Paket Ölçü (B,E,Y) / Product S. (L,W,H)	Paket Ağırlık / Package W. (Kg)
05-5307-G	10 W	161 Lm/W	1.610 Lm	B	23 550 mm	0,1 Kg	700x190x100 mm	12,6 Kg (126ad/126pcs.)
05-5314-G	15 W	161 Lm/W	2.415 Lm	B	23 550 mm	0,1 Kg	700x190x100 mm	12,6 Kg (126ad/126pcs.)
05-5315-G	15 W	161 Lm/W	2.415 Lm	B	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5316-G	19 W	161 Lm/W	3.059 Lm	B	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5317-G	22 W	159 Lm/W	3.498 Lm	B	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5319-G	19 W	161 Lm/W	3.059 Lm	B	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5322-G	22 W	159 Lm/W	3.498 Lm	B	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5323-G	25 W	158 Lm/W	3.950 Lm	B	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5324-G	27 W	158 Lm/W	4.266 Lm	B	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5335-G	35 W	145 Lm/W	5.075 Lm	C	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5307-P	10 W	184 Lm/W	1.840 Lm	A	23 550 mm	0,1 Kg	700x190x100 mm	12,6 Kg (126ad/126pcs.)
05-5314-P	15 W	184 Lm/W	2.760 Lm	A	23 550 mm	0,1 Kg	700x190x100 mm	12,6 Kg (126ad/126pcs.)
05-5315-P	15 W	184 Lm/W	2.760 Lm	A	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5316-P	19 W	184 Lm/W	3.496 Lm	A	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5317-P	22 W	182 Lm/W	4.004 Lm	A	23 1150 mm	0,22 Kg	1530x190x100 mm	13,9 Kg (63ad/63pcs.)
05-5319-P	19 W	184 Lm/W	3.496 Lm	A	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5322-P	22 W	181 Lm/W	3.982 Lm	A	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5323-P	25 W	180 Lm/W	4.500 Lm	A	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5324-P	27 W	179 Lm/W	4.833 Lm	A	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)
05-5335-P	35 W	165 Lm/W	5.775 Lm	B	23 1450 mm	0,28 Kg	1530x190x100 mm	17,6 Kg (63ad/63pcs.)

05 - 53XXX - X - HXX

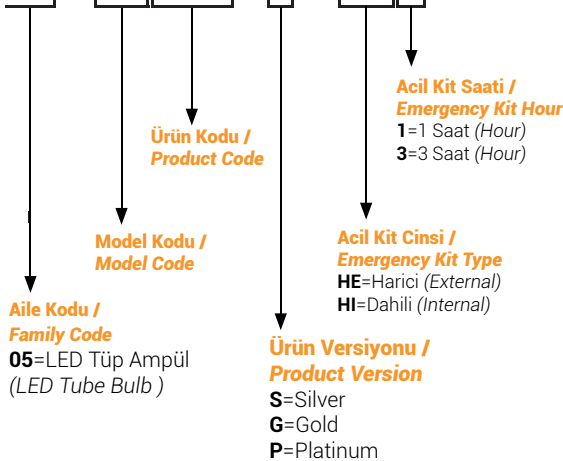

*HI1, HE1, HE3 acil kit opsiyonu bulunmaktadır.
/ There is an HI1, HE1, HE3 emergency kit option.

